

Hladilne omare za pekarstvo

Refrigerated bakery cabinets



Model Type	Širina x globina x višina Width x depth x height [mm]	Prostornina Volume [l]	Masa Mass [kg]	Temperaturno območje Temperature range [°C]	Priključna moč Power input [w]	Napajanje Power supply [V/hz]	Št. polic No. of shelves
BKS 600	780x680x2000	505	140	-3/+10	425	230/50	20
BLF 600	780x680x2000	505	150	-5/-30	600	230/50	20
BKS 900	780x960x2000	770	170	-3/+10	640	230/50	20
BLF 900	780x960x2000	770	180	-5/-30	700	230/50	20

KARAKTERISTIKE | FEATURES

Ohišje izdelano iz AISI 304 | Structure made of AISI 304

Zunanji plašč sijaj | Scotchbrite polished outer coat

Avtomatsko delovanje | Fully automatic operation

Izolacija brez CFC - 70 mm | Isolation 100% CFC free - 70mm

Leva-desna vrata | Reversible doors

Samozaporna vrata | Self closing doors

Elektronska regulacija | Electronically controlled

Dinamično hlajenje | Fan assisted cooling

Zamenljiva guma na vratih | Replaceable door gasket

Nastavljive noge | Adjustable feet

Ključavnica | Lock

Zaobljeni koti za enostavno čiščenje | Internal rounded corners for easy cleaning

Delovanje do temperature okolice +43 °C | High ambient temperature operation up to +43°C

Zamenljiva hladilna enota | Removable compact refrigerating unit

Primerne za pladnje 60 x 40 | Suitable for bakery norm trays 60 x 40

Primerne za pladnje 60 x 80 (Model 900) | Suitable for bakery norm trays 60 x 80

Avtomatsko električno odtaljevanje | Automatic electric defrost

NOTRANJA OPREMA | FITTING

20 parov nastavljivih in odstranljivih L profilov |

20 pairs of adjustable and removable L supports

OPCIJE | OPTIONS

Kolesca | Castors

Izvedba brez agregata | Remote unit

Steklena vrata pri BKS modelu | Glass door at BKS models

R290 okolju prijazen plin | R290 environment-friendly gas


Plastificirana rešetka 600 x 800 mm | Shelve 600 x 800mm

Nožno pedalo | Foot pedal



nožno pedalo

foot pedal

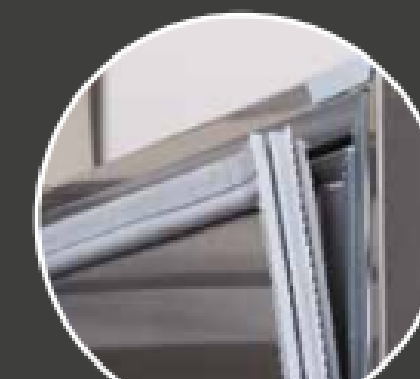

zamenljiva guma

replaceable door gasket



kolesca

castors



zaobljeni vogali

rounded corners



zamenljiv agregat

removable refrigerating unit



L profili

L supports